



Connecto® I Channel - Outside width 200 mm - with PVC gratings light grey color class A15


Code: CAN15AG



EN1433

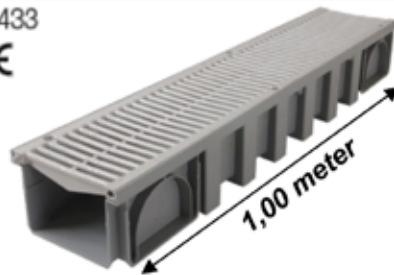

Bottom view



Side view



FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the marking, it can be used in private areas for all building applications, the environment of home, parks and gardens in class A15.

DESCRIPTION:

It consists of:

- an injected polypropylene body in light grey colour with male/female interlocking system
- two PVC gratings light grey class A15



STCAN
SVCAN
SXCAN



NAT188
NAV188
NAX188



PSCVT
PSCVV

ACCESSORIES:

To fix a grating, it's necessary to use two FIXCAN2 (set made up of 1 screw covered with zinc and 1 insert of zamak bichromate).

The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 100, 110 or 125: NAT188, NAV188 or NAX188
- vertical outlet Ø 100, 110 or 125: STCAN, SVCAN or SXCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV

CHARACTERISTICS:

Resistance class: A15

Effective width: 160 mm

Effective depth: 110 mm

Grating type: PVC

Drainage surface: 604 cm²/ml

Hydraulic section: 176 cm²



Opening dimensions: 10 / 157 mm

Weight: 4.3 kg

1



2

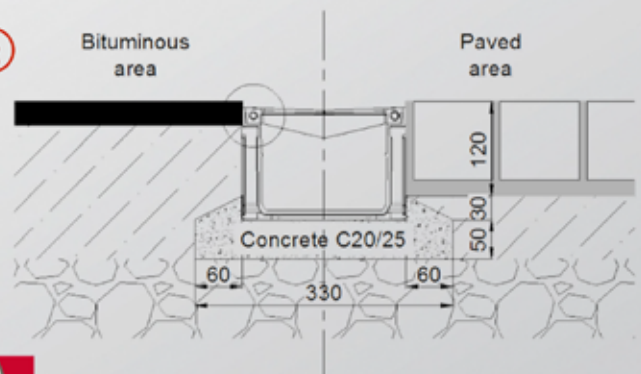

IMPLEMENTATION:

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite

QUALITY - ENVIRONMENT:

ISO 9001
ISO 14001
ISO 50001
BUREAU VERITAS
Certification



DATE: July 2015