





Kenadrain I Channel 100mm wide with composite gratings class C250 – Height 2

Code: DR102CN

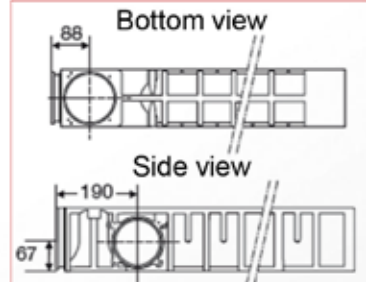

EN1433
CE

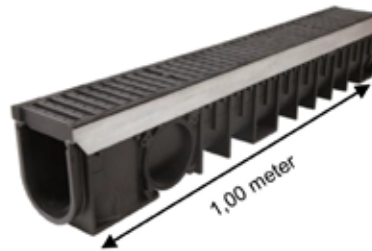

FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in public area in class C250.

DESCRIPTION:

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- two composite gratings class C250
- 1 screw per grating on galvanized locking bar



STDR10
SVDR10
SXDR10



NTDR102
NVDR102



PS100V
PS100X

ACCESSORIES:

To connect the channels to the underground network:

- end cap/end outlet Ø100 or 110 – NTDR102 or NVDR102
- lateral or vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X


CARACTERISTICS:

Resistance class: C250
Effective width: 98 mm
Effective depth: 132 mm
Grating type: Composite
Drainage surface: 430 cm²/ml
Hydraulic section: 122 cm²
Opening dimensions: 11 / 98 mm
Weight: 7.8 Kg



IMPLEMENTATION:

X = 150 mm; L = 440 mm
Z = 150 mm; Y = 90 mm; y = 85 mm

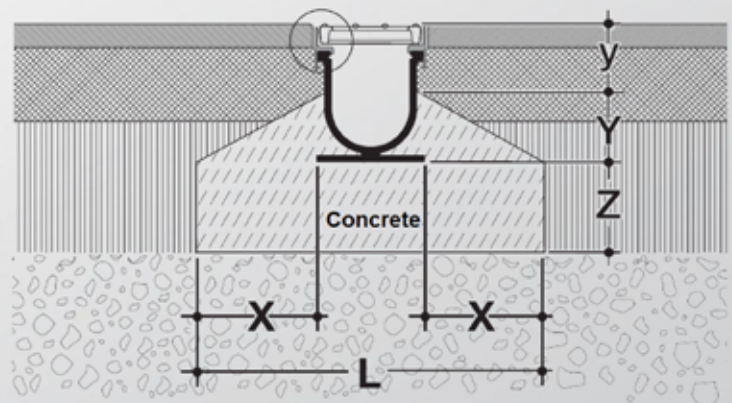

QUALITY - ENVIRONMENT:

ISO 9001
ISO 14001
ISO 50001
BUREAU VERITAS
Certification



DATE: August 2014