



# RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, class B 125, Type 60 with mesh grating MW 30/10, galvanised, locked\*

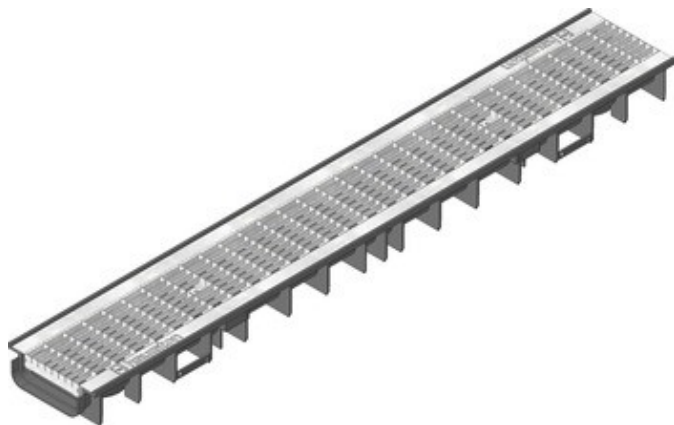

*Sustains  
car traffic*

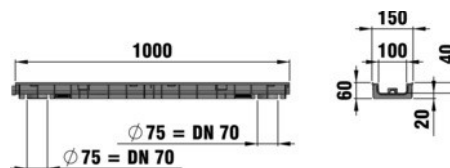

## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Drainage cross-section cm <sup>2</sup>	Inlaying depth	Item-no.
1000	150	60	5	650	35	2	41224

## ■ Product description:

RECYFIX STANDARD 100 type 60 - Channel made of PE-PP-recycled plastic, according DIN V19580 / EN 1433, with mesh grating, galvanised, mesh width 30/10 and locking device, trafficable, L/W/H 1000x146x60 mm, Item No. 41224

## ■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Electrogalvanised steel
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** hot-dip galvanised steel

## ■ Type acc. DIN EN 1433:

M

## ■ Set of rules:

EN 1433

## ■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets
- Public areas and squares



- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Underground car parks, multi-storey car parks
- Access drives private