



RECYFIX®PRO 100

RECYFIX®PRO 100, class C 250, Type 01 with FIBRETEC design slotted grating, SW 9, black

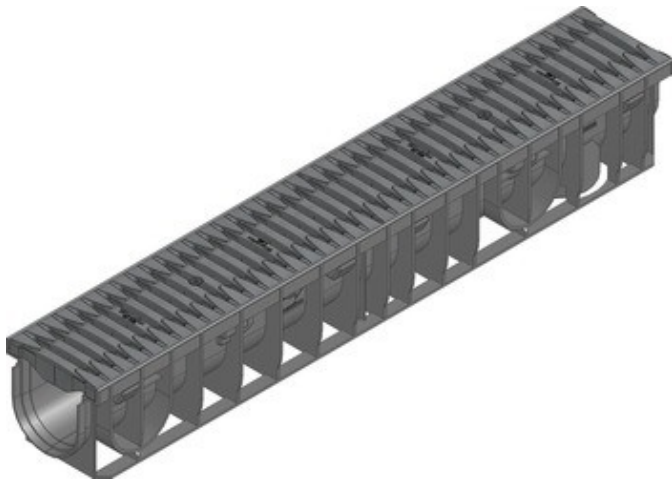

C 250

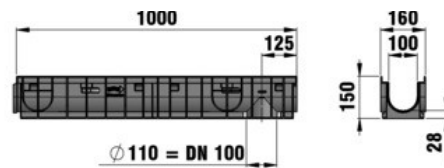

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Drainage cross-section cm ²	Inlaying depth	Item-no.
1000	160	150	4,595	372	92	20	47055

■ Product description:

RECYFIX PRO 100 Type 01 - channel made of recycled PE-PP with integrated frame, acc. EN 1433, with vertical connection possibility, with FIBRETEC slotted grating, SW 9 mm, black, locked, loading capacity A 15 - C 250, L/W/H 1000x160x150 mm, item-no. 47055

■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** reinforced Polyamide

■ Type acc. DIN EN 1433:


M

■ Set of rules:

EN 1433

■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets



- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Access drives private