



# RECYFIX®PRO 150

RECYFIX®PRO 150, classe B 125, Type 01 with FIBRETEC design slotted grating, SW 9 mm, black, locked

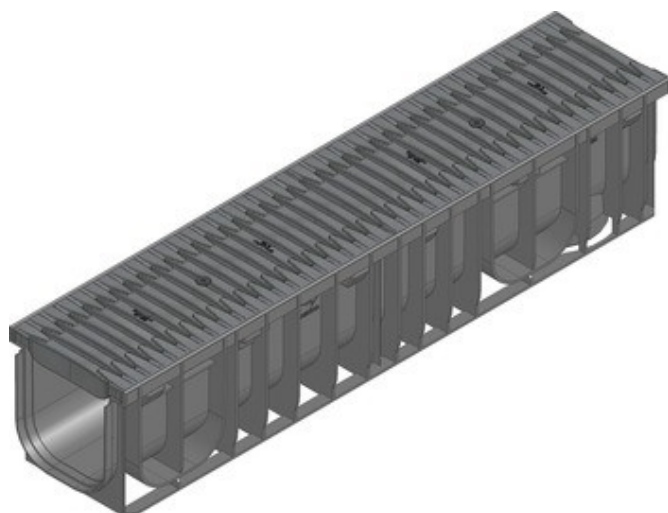

B 125

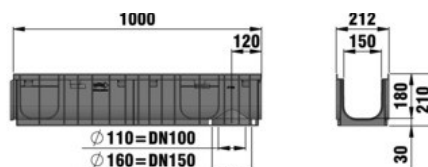

## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Drainage cross-section cm <sup>2</sup>	Inlaying depth	Item-no.
1000	212	210	7,4	500	230	20	47135

## ■ Product description:

RECYFIX PRO 150 Type 01 Channel made of PE-PP, acc. EN 1433, with integrated frame, with vertical connection possibility with FIBRETEC Slotted grating, SW 9 mm, with horizontal shearing protection and locked, black, loading capacity A 15 - B 125, L/W/H 1000x212x210 mm, Item-No. 47135

## ■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** reinforced Polyamide

## ■ Type acc. DIN EN 1433:


M

## ■ Set of rules:

EN 1433

## ■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets



- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Access drives private