



Connecto® I Channel - Outside width 130 mm - with composite gratings class B125

Code: CAN10BN

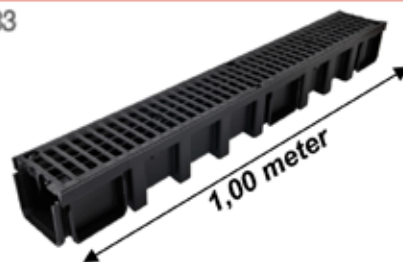

EN1433


Bottom view

Side view


FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in footways, pedestrian areas, private car parks or car parking decks in class B125.

DESCRIPTION:

It consists of:

- an injected polypropylene body in black colour with male/female interlocking system
- two composite gratings class B125
- four black galvanized steel screws

ACCESSORIES:


The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 100 or 110: NAT177N or NAV177N
- vertical outlet Ø 100 or 110: STCAN or SVCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV



CHARACTERISTICS:

Resistance class: B125
 Effective width: 98 mm
 Effective depth: 83 mm
 Grating type: Composite
 Drainage surface: 411 cm²/ml
 Hydraulic section: 81 cm²
 Opening dimensions: 15 / 18 mm
 Weight: 2,5 kg

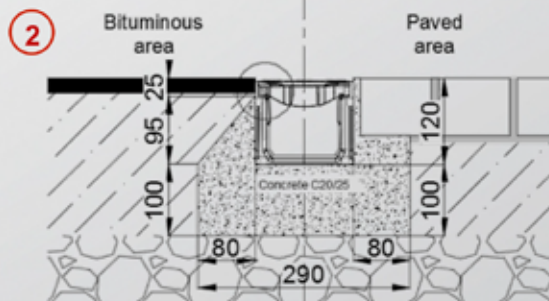

IMPLEMENTATION:

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite

QUALITY - ENVIRONMENT:

ISO 9001
 ISO 14001
 ISO 50001
 BUREAU VERITAS
 Certification



DATE: August 2015