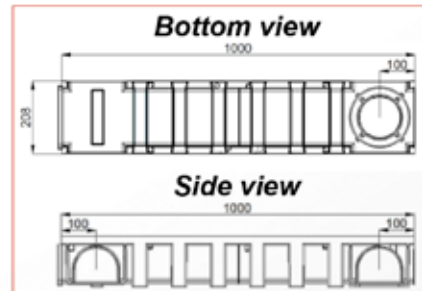
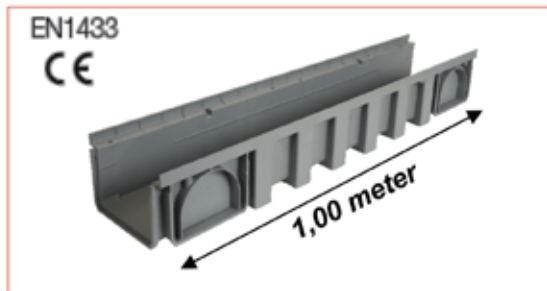
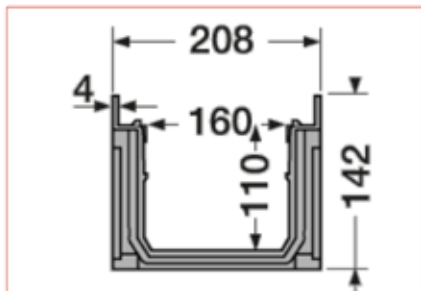


# Connecto® I Channel – Outside width 200 mm - light grey

Code: CAN188


**FUNCTION:**

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in private areas for all building applications, the environment of home, pedestrian areas, private car parks or car parking decks in class A15 or B125.

**DESCRIPTION:**

This channel body is injected in light grey polypropylene with male/female interlocking system. The gratings GRL88 (grey) and GRL88S (sand) and the cover TR88 (grey) are suitable with this channel.

**ACCESSORIES:**

The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 100, 110 or 125: NAT188, NAV188 or NAX188
- vertical outlet Ø 100, 110 or 125: STCAN, SVCAN or SXCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV

**CHARACTERISTICS:**

Effective width: 160 mm  
 Effective depth: 110 mm  
 Hydraulic section: 176 cm<sup>2</sup>  
 Weight: 1.8 kg

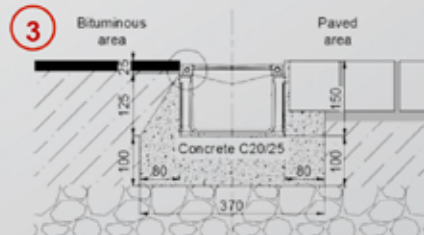
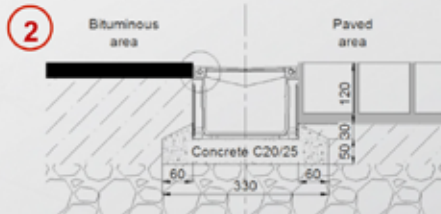

 STCAN  
 SVCAN  
 SXCAN

 NAT188  
 NAV188  
 NAX188

 PSCVT  
 PSCVV

**IMPLEMENTATION:**

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite for class A15
3. See the scheme opposite for class B125


**QUALITY - ENVIRONMENT:**

 ISO 9001  
 ISO 14001  
 ISO 50001  
 BUREAU VERITAS  
 Certification


DATE: July 2015