




# Kenadrain I Park channel 100mm wide with composite gratings class C250


Code: DR100CN



EN1433  
CE

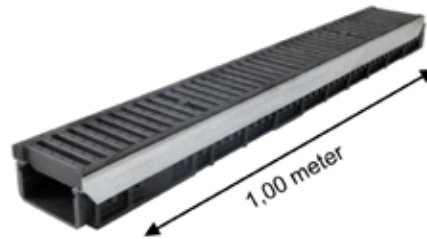

Bottom view



## FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in public area in class C250.

## DESCRIPTION:

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- two composite gratings class C250
- 1 screw per grating on galvanized locking bar

## ACCESSORIES:

To connect the channels to the underground network:

- end cap/end outlet Ø50 – NJDR100
- vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X



STDR10  
SVDR10  
SXDR10



NJDR100




PS100V  
PS100X

## CARACTERISTICS:

Resistance class: C250  
Effective width: 98 mm  
Effective depth: 51 mm  
Grating type: Composite  
Drainage surface: 430 cm<sup>2</sup>/ml  
Hydraulic section: 47.5 cm<sup>2</sup>  
Opening dimensions: 11 / 98 mm  
Weight: 5.5 Kg

## IMPLEMENTATION:

X = 150 mm; L = 430 mm  
Z = 150 mm; y = 85 mm

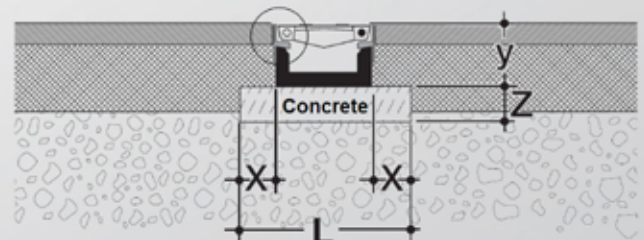

## QUALITY - ENVIRONMENT:

ISO 9001  
ISO 14001  
ISO 50001  
BUREAU VERITAS  
Certification



DATE: August 2014