
# Wicoll DATA SHEET


## Kenadrain I Channel width 150, class C250

Code: DR152CF









### **■ FUNCTION:**

This product is to drain run-off water with gratings of length 1000 mm, of class C250 complying with the standard NF-EN 1433, holding the CE marking, assembled via a male/female connection system with locking

#### ■ DESCRIPTION:

It is comprised of:

- a injected recycled polypropylene black body
- two galvanized steel edges.
- two black cast iron gratings class C250
- 4 locking system with bolts per grating





#### ACCESSORIES:

To connect the channels to the underground network:


- PVC end caps, vertical or lateral outlets (Ø125 or Ø160)
- EKSO sump units manufactured also in PVC

### ■ CHARACTERISTICS:

Resistance class: C250 Effective width: 163 mm Effective depth: 165 mm Grating type: Cast iron

Drainage surface: 624 cm<sup>2</sup>/ml Hydraulic section: 240.8 cm<sup>2</sup> Opening dimensions: 18 / 158 mm

Weight: 19,8 KG

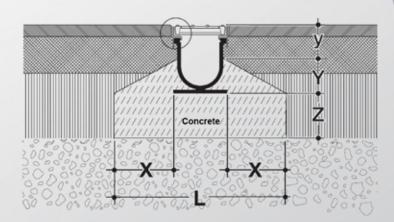

#### ■ IMPLEMENTATION:

X = 150 mm; L = 510 mm

Z = 150 mm; Y = 125 mm; y = 85 mm

■ QUALITY- ENVIRONMENT:



DATE: December 2013



Head office and Plants: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET Cedex

Email: export.nicoll@aliaxis.com

NON CONTRACTUAL DOCUMENT

an OAliaxis company