
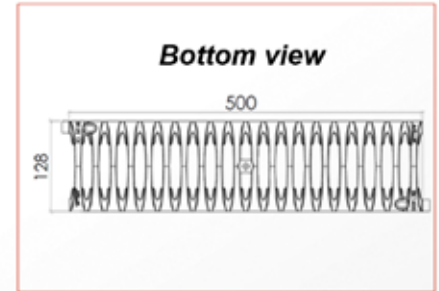
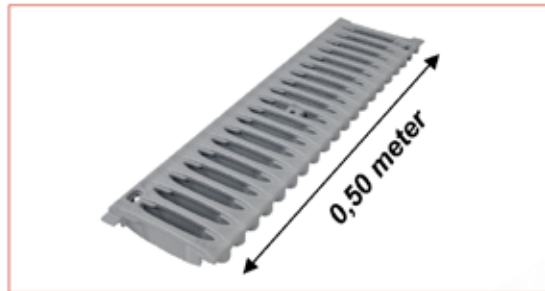


Connecto® I PVC grating - light grey colour - class B125

Code: GR77

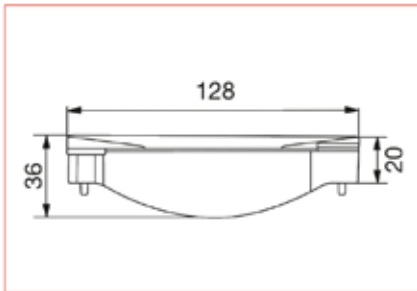

FUNCTION:

The grating is designed to drain run-off water. In accordance with EN1433 standard and the **CE** marking, it can be used in footways, pedestrian areas, private car parks or car parking decks in class B125.

DESCRIPTION:

This grating class B125 is injected in light grey PVC with anti-UV treatment.



ACCESSORIES:

This grating can be installed with these types of drainage channel:

- High channel body Connecto width 130: CAN177 and KCAN177N
- Shallow channel body Connecto width 130: CAB773, CABS773 and CAB133A




To fix a grating on CAB133A, it's necessary to use one FIXCAB13 (locking system with galvanized screw). To fix a grating on CAN177, KCAN177N, CAB773 and CABS773, it's necessary to use two FIXCAN (set made up of one screw).

CHARACTERISTICS:

Resistance class: B125
 Width: 128 mm
 Length: 500 mm
 Overall height: 36 mm
 Grating type: PVC
 Drainage surface: 471 cm²/ml
 Opening dimensions: 17 / 96 mm
 Weight: 0,8 kg

IMPLEMENTATION:

1. See the installation scheme opposite with the channel CAN177 and KCAN177N.
2. See the installation scheme opposite with the channel CAB773 and CABS773.
3. See the installation scheme opposite with the channel CAB133A.
4. If you don't use Connecto channel, please leave a space between gratings to allow a free expansion.

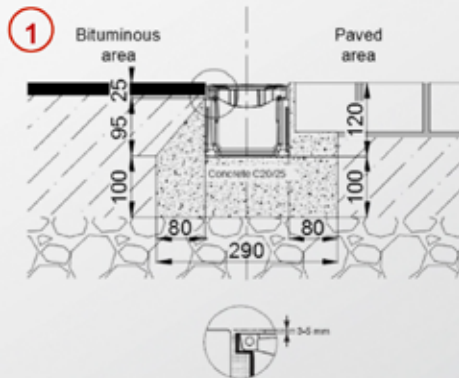

QUALITY - ENVIRONMENT:



DATE: August 2015